


Solar Control Film

Lower Mirror - Neutral Grey

Code: SO-35NG-iSR

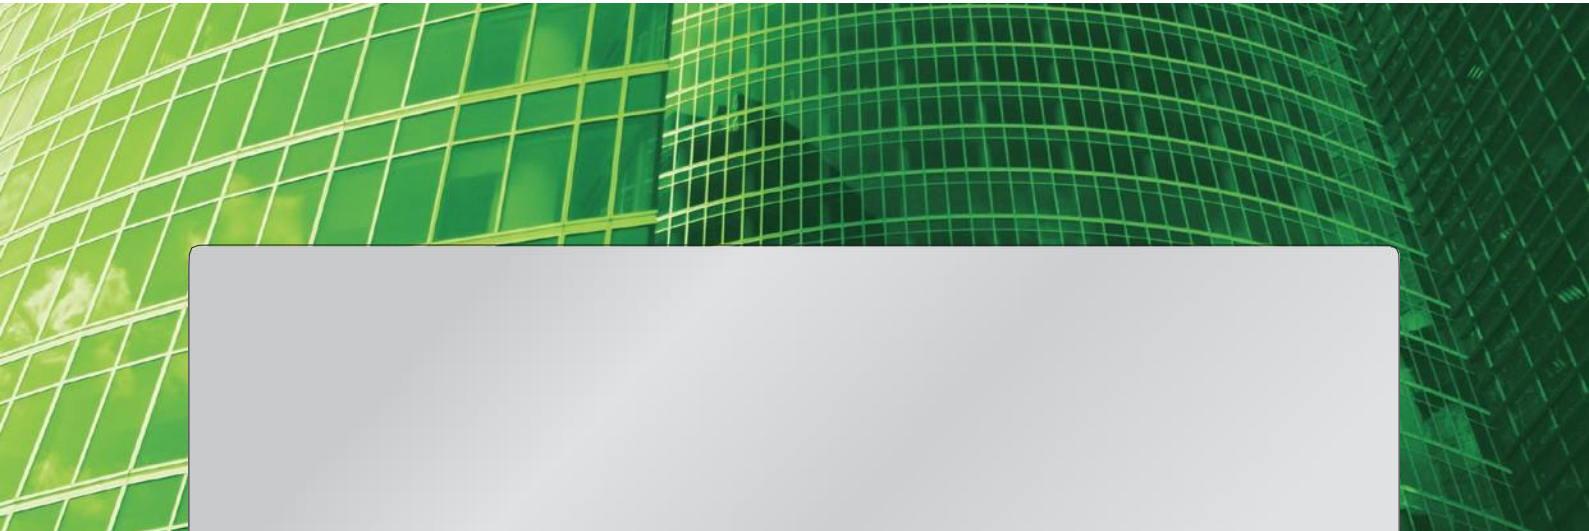

Opalux[®] Lower Mirror Neutral Grey 35 solar control film offers a balanced year-round performance of good solar heat rejection with higher light transmission and additional winter heat-saving benefits.

Opalux[®] Lower Mirror Neutral Grey 35 coloured film is specially metallised to allow plenty of light along with good solar control properties. Avoiding the mirrored look of traditional solar control films, this presents a pleasing architectural appearance.

This film helps to reduce cooling costs and therefore Climate Change Levy liability by lightening the load on air conditioning equipment. Government and business organisations can use Opalux[®] solar control window films as an integral part of seeking to comply with the Carbon Reduction Commitments scheme and The Carbon Trust policies.

Opalux[®] Lower Mirror Neutral Grey 35 solar control film is used where a neutral appearance is required, and is ideally suited to architecturally sensitive applications such as listed buildings.

This film achieves solar heat and glare control but can still allow plenty of vision both ways, and make less visual impact than traditional mirrored films. The film is applied internally and, in daytime, lends the glass a neutral grey lower mirror outside appearance, whilst from the inside, the visual effect, much less noticeable, is a light tint.




Features	Benefits
Good solar heat and glare rejection	Alleviate the discomfort caused by excessive heat and glare
Cuts energy use for cooling	Reducing energy tax liability and contributes to a reduced carbon footprint
Lower mirror appearance	Lower visual impact, especially suited to architecturally sensitive buildings
Quick, retro-fit installation	Can be used where costly and disruptive large-scale replacement of existing glazing is not a viable option
Scratch-resistant	Suitable for most non-abrasive window-cleaning methods
Screening of harmful UV rays	Reduced fading of interior furnishings



Solar Control Film

Lower Mirror - Neutral Grey

Code: SO-35NG-iSR

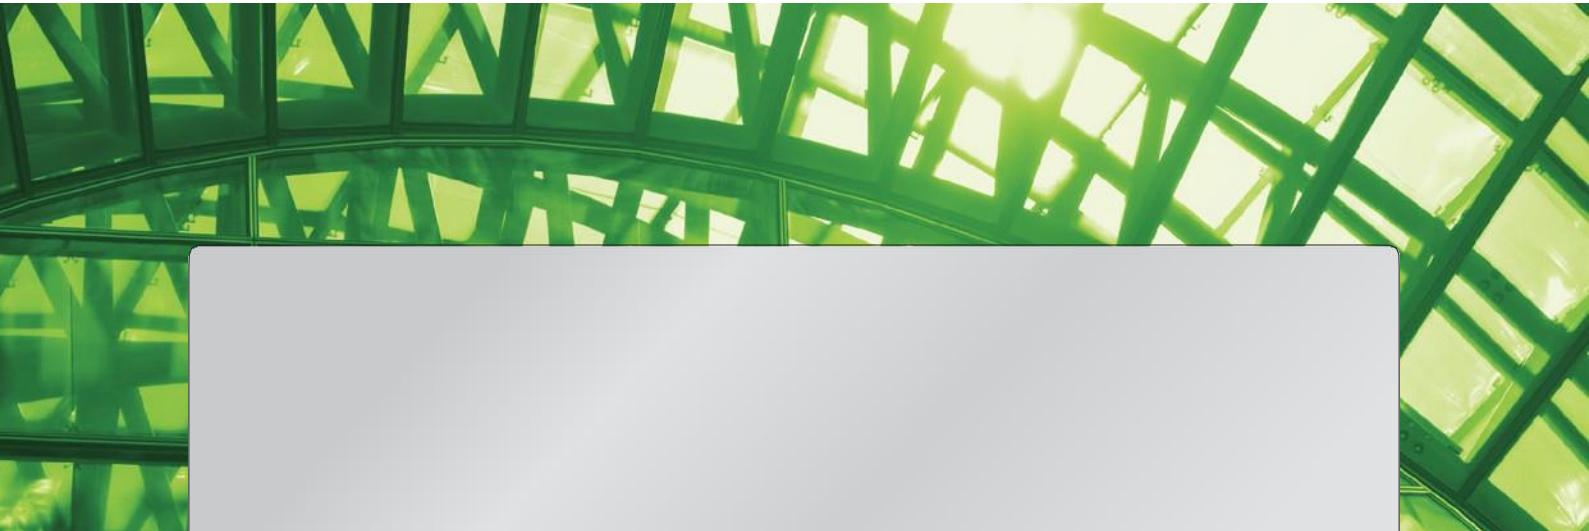

Performance Data

Total Solar Energy	
Transmitted	26%
Reflected	22%
Absorbed	52%
Visible Light	
Transmitted	35%
Reflected	17%
Ultra-Violet Rejected	<99%
Glare Reduction	60%
Shading Coefficient	0.46
Total Solar Energy Rejected	61%
Product Warranty	10 years

Specification:

The solar control window film is to be Opalux® SO-35NG-iSR, as manufactured by Opalux®. The film is to be installed to the interior surface of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure.

Notes:

Test results are produced from film applied to clear glass. Performance data is subject to change without prior notice. Accurate selection of window films requires specialist knowledge, and it is recommended that specifiers contact the company at the specification stage. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct or consequential loss howsoever arising.

We always recommend a trial installation is carried out to determine satisfactory performance of the one-way effect in all lighting conditions, and especially where the balance of lighting levels is uncertain, i.e. internal glazed partitions.

An exterior grade version is available. Refer to code: SO-35NG-eSR